


Connflex®

CONNECTORS



- ✓ For sensitive, ambitious bulk materials designs
- ✓ Product flow visibly, high transparency
- ✓ Compensation of the length stretch
- ✓ Compensation for the weighing
- ✓ Vibration compensation
- ✓ Easily interchangeable

- ✓ High flexibility
- ✓ CIP-compliant
- ✓ Tested by security institute
- ✓ Solvent- and acid-resistant
- ✓ Flange connection selectable
- ✓ Temperature-resistant up to 205°C
- ✓ FDA, EU and Halal certified materials
- ✓ Pressure and under pressure resistant
- ✓ Connectors on desire length available
- ✓ GMP-compliant dead spot free connection
- ✓ ATEX compliant up to Zone 0, 1 + 2 / 20, 21+ 22
- ✓ Sustainable, patent-registered construction (Patent Nr. 2228323)

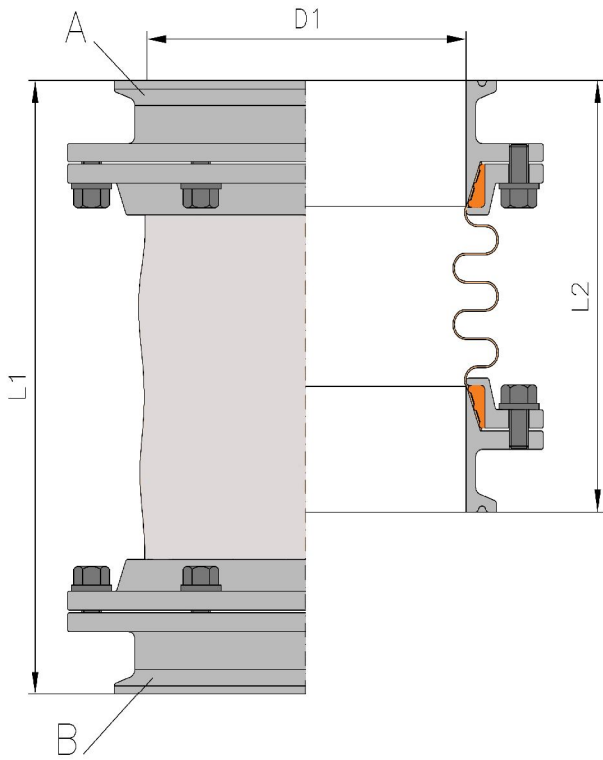


Designated Performance:

- Yes No
- Bulk material: _____
- Acid in bulk material: _____
- Acid pH: _____
- Base in bulk material: _____
- Base pH: _____
- Resistant against solvents
- Which solvents will be used:

- Concentration of solvent in bulk material:
- _____
- _____

- Product temperature: _____ °C
- Internal pressure: _____ mbar
- Vacuum: _____ mbar
- FDA-compliant
- Static conductive
- ATEX: _____
- Additional information: _____

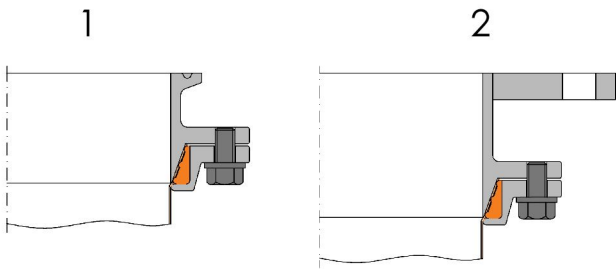

Version	A	B	D1 mm	L1 mm	L2 mm

A = Upper connection
 B = Lower connection
 1 = TriClamp-connection DIN/ISO
 2 = Flange PN6 ÷ PN16
 D1 = 100, 150, 200, 250, 300 mm
 L1 = 100 ÷ 500 mm